

# DENSO

WIRELESS SCANNER

# NEW > SE1 SERIES



2D code model  
SE1-QB




Barcode model  
SE1-BB




**Data entry to smart devices is now easier, quicker and more accurate!**

iOS   Android   Windows® supported!

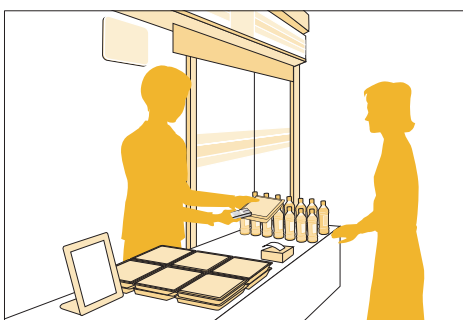

Simplifies POS use at stores

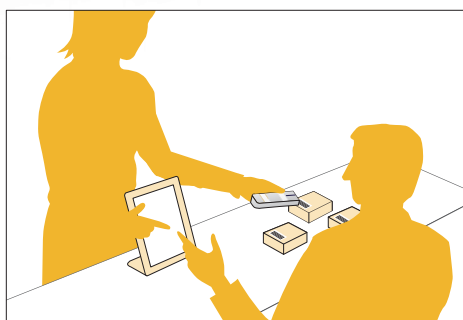

For route salespersons



Helps prevent medical errors in hospitals

### Feature 1

#### Long operation

This scanner can be operated for a long time, reducing operating costs. Even if suddenly out of battery power, there's no need to worry; this scanner is battery-powered.



### Feature 2

#### Supports LCD scanning


Scanning codes displayed on a smartphone or other device is also supported.



### Feature 3

#### Connects to all detected Bluetooth® devices

No complicated settings required. Do settings by just scanning the connection code.

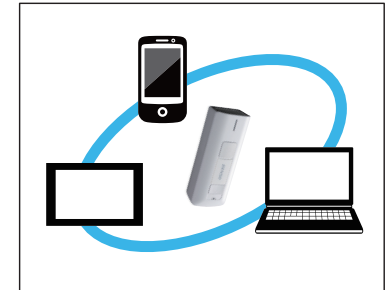

### SE1 series specifications

		2D code model	Barcode model
Type		SE1-QB	SE1-BB
Scanner		Area sensor	
Mode		Advanced scan plus (CCD)	
Readable codes	2D code	QR code,micro QR code,iQR,SQR,PDF417,micro PDF417,DataMatrix(ECC200),Aztec,GS1 Composite(EAN.UCC Composite),Maxi Code	-
	Barcode	EAN-13/8,(JAN-13/8),UPC-A/E,UPC/EAN(with add-on),Interleaved 2 of 5(ITF),CODABAR(NW-7),Standard 2 of 5(STF),CODE39,CODE93,CODE128,GS1-128 (EAN-128),GS1 DataBar (RSS)	EAN-13/8,(JAN-13/8),UPC-A/E,UPC/EAN(with add-on),Interleaved 2 of 5(ITF),CODABAR(NW-7),CODE32,CODE39,CODE93,CODE128,GS1-128 (EAN-128),GS1 DataBar (RSS),Standard 2 of 5(STF),MSI,Plessey
Minimum resolution	2D code	0.167 mm	-
	Barcode	0.125 mm	
PCS value		0.3 min.	
Angle		±50°	
Scanning confirmation		Confirmation LED (blue, red), Buzzer	
Communication interface	Method	Bluetooth ver. 2.1 + EDR-based class 2	
	Profile	SPP, HID	
Power	Power	Alkaline AA battery x 2 or AA Eneloop® battery x 2	
	Operating time*1	50 hours	100 hours
Environment requirements	Security level	IPX2	
	Drop impact resistance*2	1.2 m high over a concrete floor with 6 times	
	Operating temperature	-5~50°C	
Weight		Approx. 60 g (not including batteries)	

\*1: With one reading pass over a 5 s period.

\*2: These are test values, but not guaranteed values.

### Product configuration

#### Accessories

- Scanner
- Operation Guide (with code menu for settings)
- \* Batteries are not included.

#### Software

- Setting software (Scan Tune App)
- Software application to prepare parameter setting codes for SE1 series on PC.
- \* Downloadable via QBdirect.


#### Option (sold separately)

- Neck strap (NSBHT-500)
- Hand strap (HSSE1)



#### Silicone cover

- Silicone cover common to SE1-BB and -QB (Clear)
- Silicone cover common to SE1-BB and -QB (Black)

### Dimensions



### Scanning performance

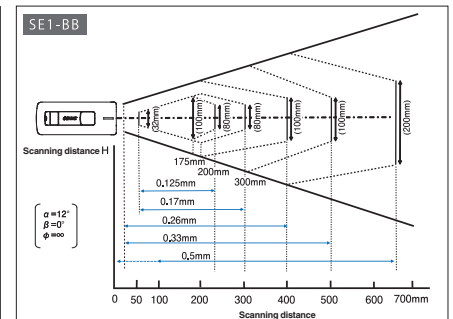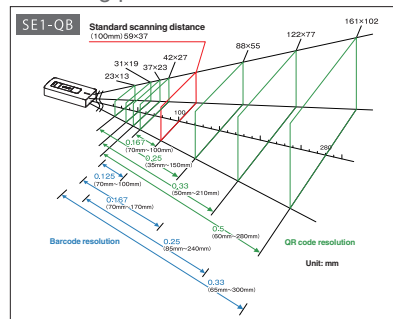

#### To use this product safely

- Before using this product, please read its User's Manual thoroughly for correct use.

For more information, please visit our website

<http://www.denso-wave.com/en/adcd/>



QR Code is registered trademark of DENSO WAVE INCORPORATED.  
● Appearance and specifications are subject to change without prior notice. ● Description stated in this catalogue is as of July, 2014.